


CLEANSTAR

Direct Pump Vacuum

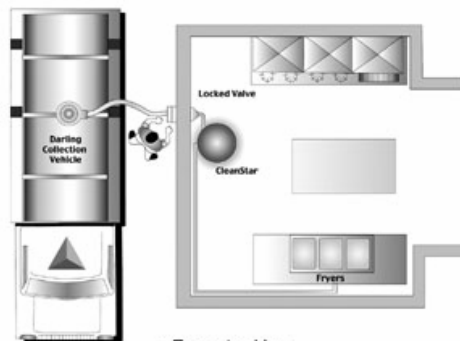

- Easy to Use
- Reduces Spills and Burns

Model 1500-D Direct Pump Features

Vacuum Pump will transfer used cooking oil directly from your fryer to your CleanStar tank

Darling's CleanStar system includes:

- *Transfer hose and filter wand*

Tank features include:

- *Stainless steel outer shell*
- *Increased Capacity of 1500 lbs.*
- *30" diameter*
- *Overall height 92"*
- *Energy saving Immersion heater*
- *2 Level Probe and Timer Control Panel*
- *Power Failure Alarm*
- *Dish Bottom tank to prevent "fine" buildup*



Classified to NSF4

For more information or to place your order contact:

DARLING

INTERNATIONAL

All Systems include:

1 year parts warranty


Operation and installation manual

Training DVDs or Videos

CLEANSTAR is backed by a team of technical professionals.

CLEANSTAR

Direct Pump for Liquid Shortening

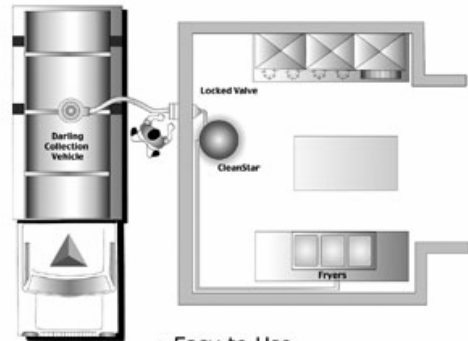

- Easy to Use
- Reduces Spills and Burns

Model 1500-H Direct Pump Features

Uses your fryer pump and filter to transfer oil to your CleanStar tank

Darling's CleanStar system includes:

- *Wall Mounted Manifold Kit*

Tank features include:

- *Stainless steel outer shell*
- *Increased Capacity of 1500 lbs.*
- *30" diameter*
- *Overall height 91"*
- *2 Level Probe and Control Panel*
- *Energy saving Immersion heater*
- *Power Failure Alarm*
- *Dish Bottom tank to prevent "fine" buildup*

Customer must purchase Direct Kit from fryer manufacturer



Classified to NSF4

For more information or to place your order contact:

DARLING

INTERNATIONAL

All Systems include:

1 year parts warranty

Operation and installation manual

Training DVDs or Videos

CLEANSTAR is backed by a team of technical professionals.



Exterior Insulated Tank Enclosure



Construction and Features

- Welded 661-T6 Aluminum structural interior frame.
- Rugged Kynar® coated Aluminum exterior.
- Polyurethane Insulated.
- Rust and Weather resistant.
- Designed to mount to the exterior wall of building.
- Houses the **3072-NA** Frontline Containment Tank.
- Complete structure is Non Corrosive.
- Solves available space and tank placement issues.
- For use in Remote or Direct-Plumbed® Systems.
- Exterior color is almond or brown, suitable for painting.
- See the 3072-NA spec sheet for tank specifications.

Specifications

Model	PTE-1
Capacity	Approx. 1600 lb
Installation Space Req.	42 in. l x 42 in. w x 90 in. h
Shipping Weight	175 lb
Warranty	1 year



Frontline International, Inc.
 95 16th Street SW Barberton, Ohio 44203
 Tel: 330-861-1100 Fax: 330-861-1105
 Web: www.frontlineii.com Email: info@frontlineii.com

May 2006



CAUTION
HOT OILING

Baker Commodities Inc.
TGM Total Grease Management
800-427-0096
Tyrul General Removal
Grease Trap & Interceptor Pumping
Hydro Jetting & Drain Cleaning









FIRE EX
DO NOT
BLOC



CAUTION
HOT FITTING

Professional Services
Water and Sewer Cleaning
MC ORAN'S SERVICE
(800) 427-0696

UL LISTED
UL 198

UL LISTED
UL 198





KELLER

Water Commodities Inc.
TGM Management
3100-427-0106
100% Safflower
100% Safflower
100% Safflower

100% Safflower
100% Safflower
100% Safflower

HOME PRICE
DELL 10V

OMATOES